





#### COLOR OPTIONS:



#### TRIM OPTIONS:



#### MAIN FEATURES:



INDUCTION COOKING



METAL KNOBS & HANDLES



INTERNAL GREASE FILTER



VENTILATED DOORS WITH COOLING SYSTEM




TELESCOPIC GLIDE SHELF SUPPORTS



TRIPLE PANE GLASS DOORS

#### COOKTOP CONFIGURATION:

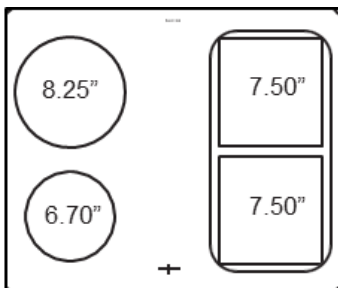

ZONE SIZE (IN)	MAX OUTPUT (W)
6.7	2,200
7.5	3,700
8.25	3,700

## R—S30M00014

### DOLCEVITA INDUCTION 30" RANGE

#### GENERAL FEATURES

Size	30"
Type	Induction Cooktop + Electric Oven
Clock and Timer	Digital & Programmable
Control Knobs	Metal
Power Requirements	240 Volt 60Hz 50 Amp dedicated circuit 4-conductor CSA/UL listed power cord
Warranty	2 years parts & labor within policy

#### COOKTOP FEATURES

Burners	4 Induction Zones – 11,900W Max
Left Front	6.7" ø – 1,400W w/ 2,200W Boost
Left Rear	8.25" ø – 2,300W w/ 3,700W Boost
Right Front	7.5" ø – 2,100W w/ 3,000W Boost
Right Rear	7.5" ø – 2,100W w/ 3,000W Boost
Induction Features	Rapid Boil, Accelerator Mode, Power Boost, Simmer Setting, Safety Control Lock

#### OVEN FEATURES

Interior Oven Dimension (in.)	26 1/2" W x 15D x 13H
Power Rating	3750W
Convection Fan	Yes
European Convection	Yes
Broil Element	Yes – Full Width
Functions	Bake, Bottom Bake, Upper Bake, Broil, Maxi Broil, Convection Bake, Convection Broil, Defrost, Pizza, Fan Assist
Oven Door	3 Pane Removable Glass
Oven Lights	2
Included Accessories	1 – standard rack, position adjustable 1 – glide rack, position stationary 1 – enamel drip broiler tray

#### DIMENSIONS

Width (in)	29 7/8"
Height (in) w/o Backguard	35 1/2" – 37 1/4"
Height (in) of Backguard	4"
Adjustable Leg Height	5 5/8" – 7 3/8"
Depth (in) w/ Backguard	25 1/2"

#### OPTIONAL ACCESSORIES

GRIDDLE/TEPPANYAKI	Cast Iron	LFINDTEP
RIBBED GRILL PAN	Cast Iron	LFINDFRD
BACKSPLASH – 24"H	Stainless Steel	SR30H-
PLINTH KICKPLATE	Stainless Steel	LF30PLNSS




## R—S30M00014


### DOLCEVITA INDUCTION 30" RANGE

EuroChef USA | [www.lofra.us](http://www.lofra.us)


#### DIMENSIONS:

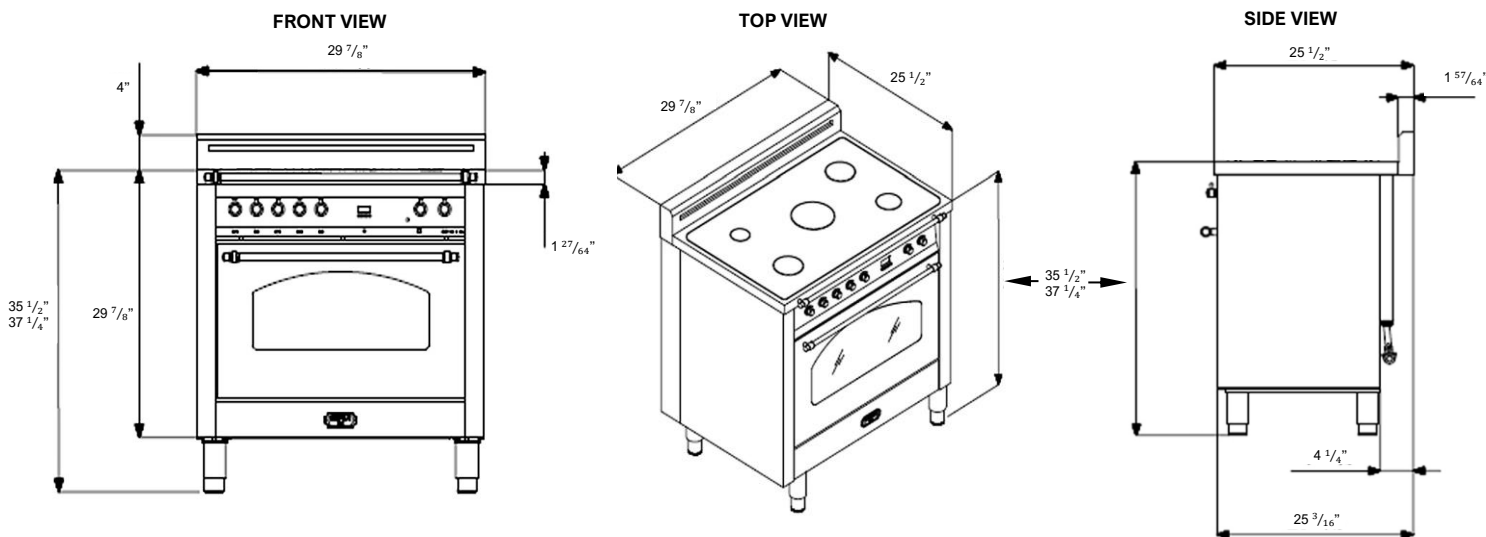


#### INSTALLATION CLEARANCES:

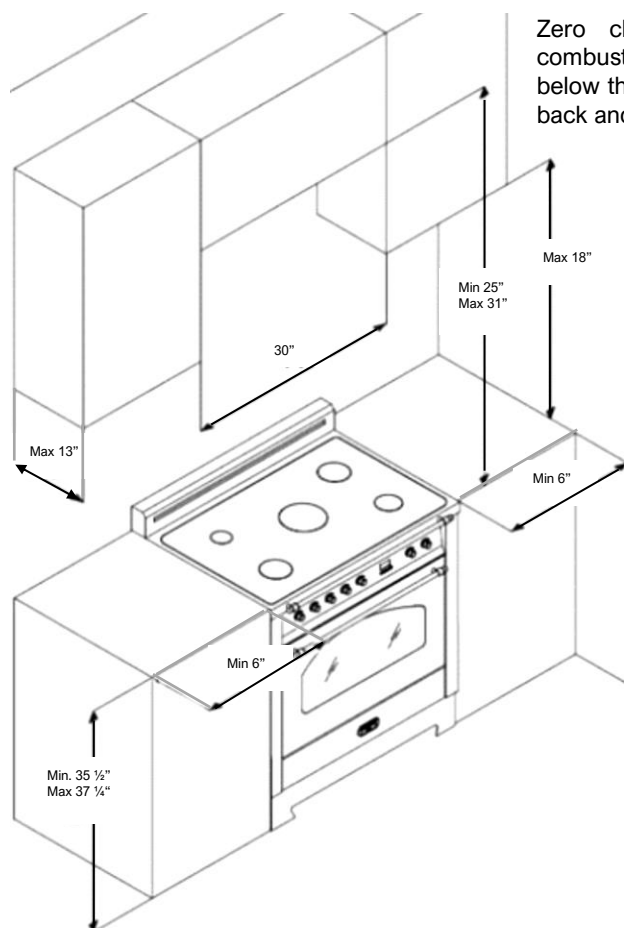

Zero clearance required between combustible construction that lies below the countertop surface and the back and sides of the appliance

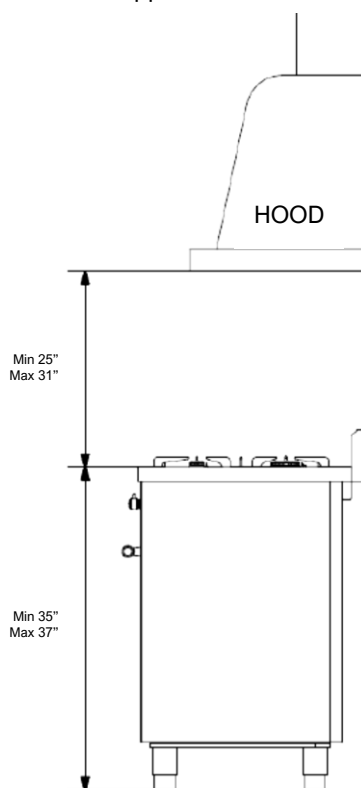

#### ELECTRICAL CLEARANCES:

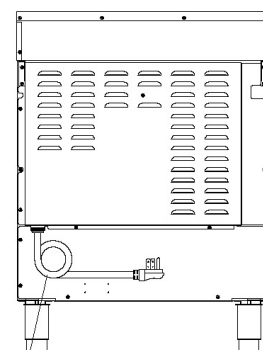

##### SUPPLY CABLE LENGTH $51 \frac{1}{2}"$


For USA only: Power supply cord is not supplied but is available through your local electrical supply house.

##### ELECTRICAL LINE

A properly-grounded horizontally- mounted electrical receptacle should be installed. Use only 4-conductor CSA/UL listed range cord rated at 50 amps with 250V minimum and provided with ring terminals. The cords should be provided with strain relief of conduit connector.

Always check all local code requirements.

Standard NEMA 14-50R wall receptable



Power supply cord with NEMA 14-50P plug

