

Jackery Smart Home Kit Over View

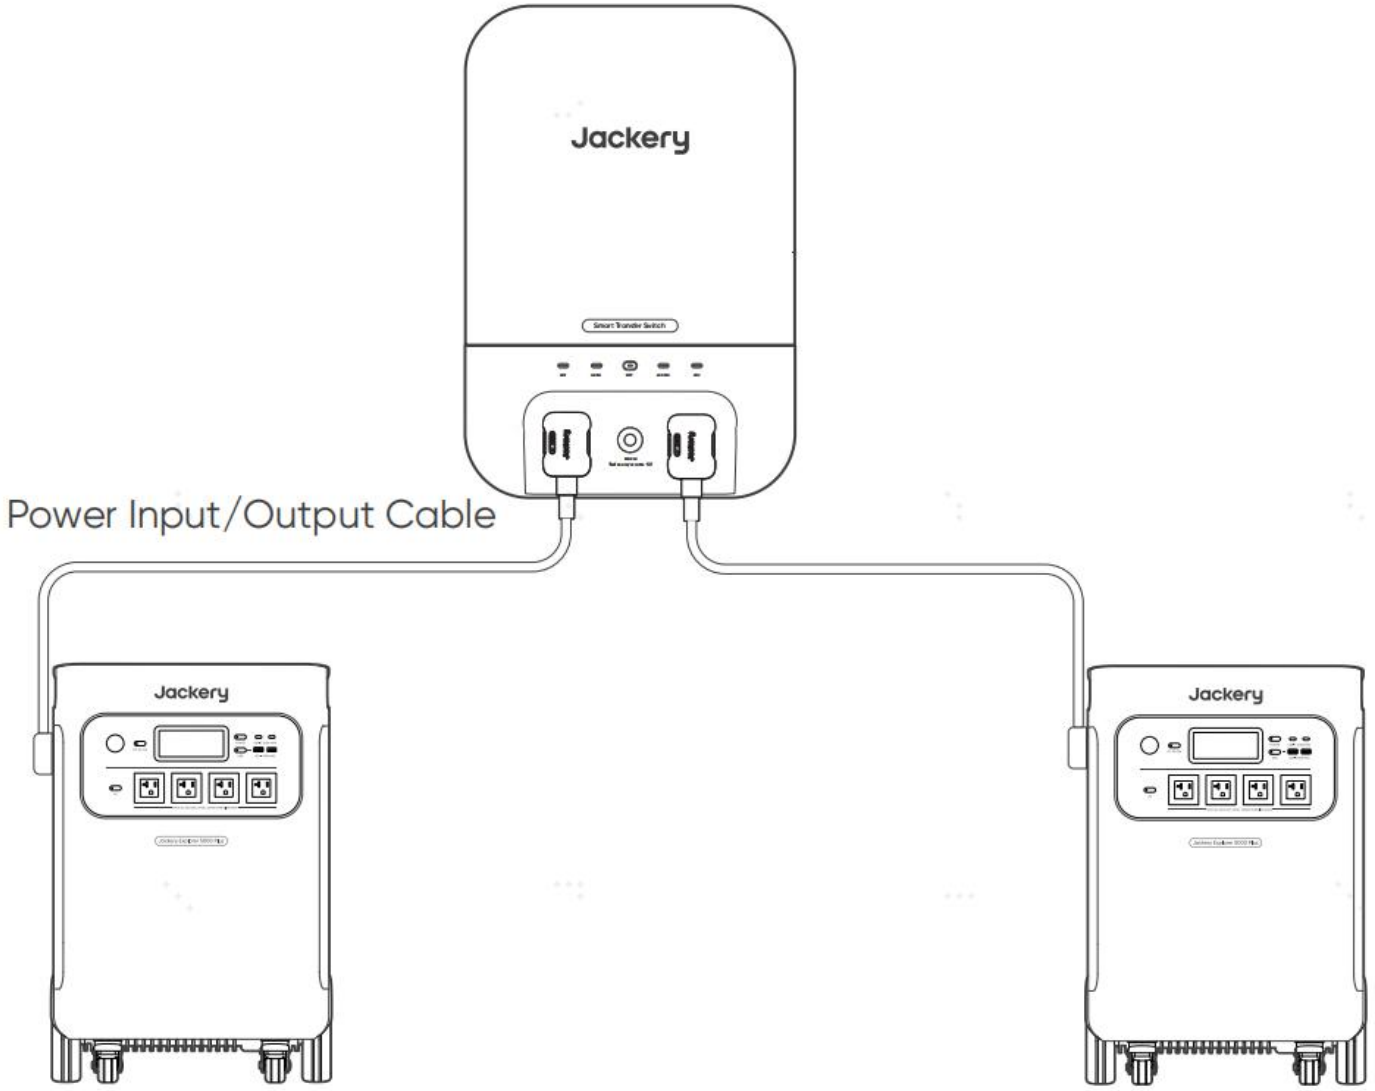


Removal 1

1 Turn off breakers and E5000Plus

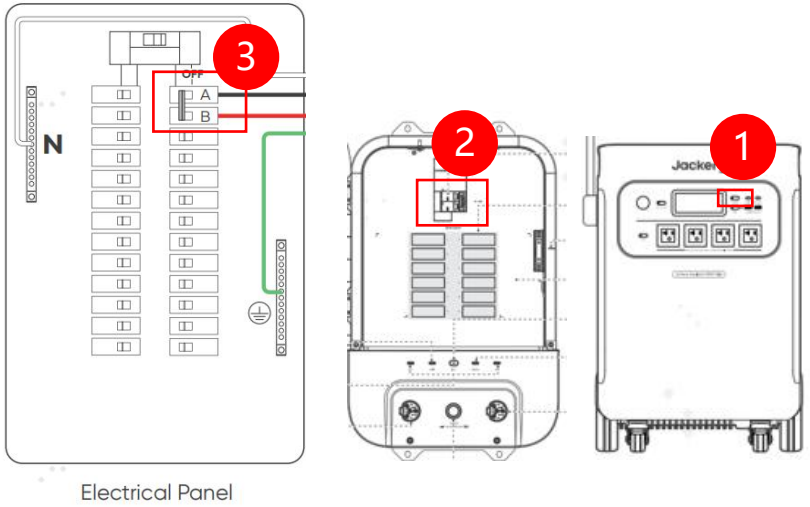


- Turn off E5000Plus.
- Turn off the circuit breakers on the STS and the home distribution panel.

2 Disconnect with Power Station

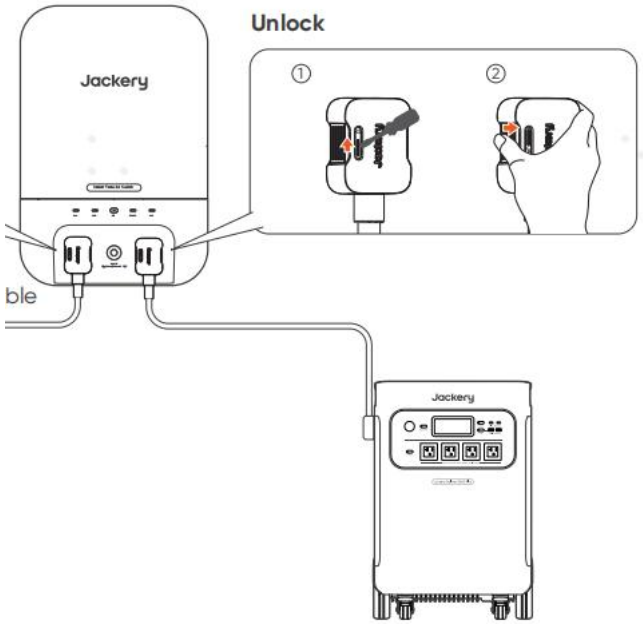

- The power input/output cable’ s plug need to be unlocked from the STS to E5000Plus.


3 Unlock the Panel

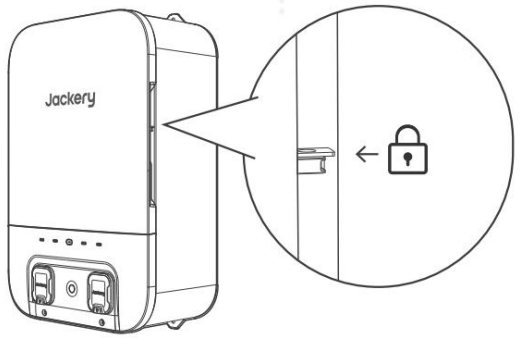

- Unlock the STS cover.

Removal 2

1 Disconnect the Grid Conductors

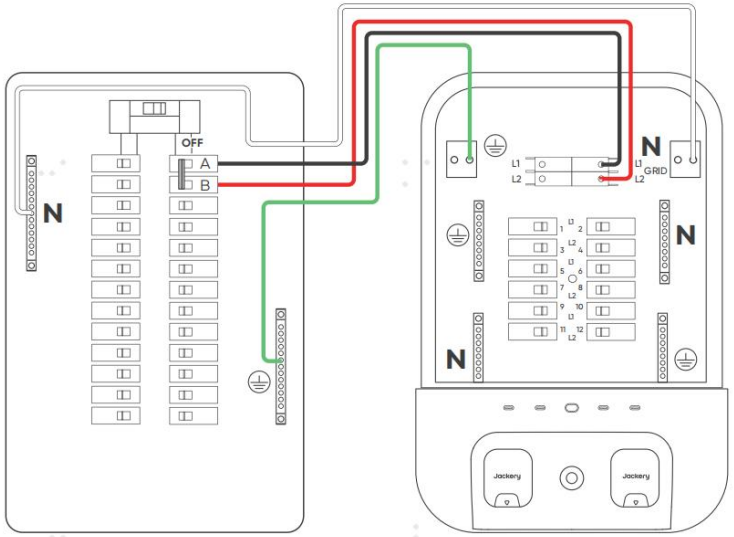


Electrical Panel

Jackery Smart Transfer Switch

- Disconnect the Hot wire, Ground wire, and Neutral wire from the electrical panel to the STS.


2 Disconnect the Grid Conductors the Home Load Conductors

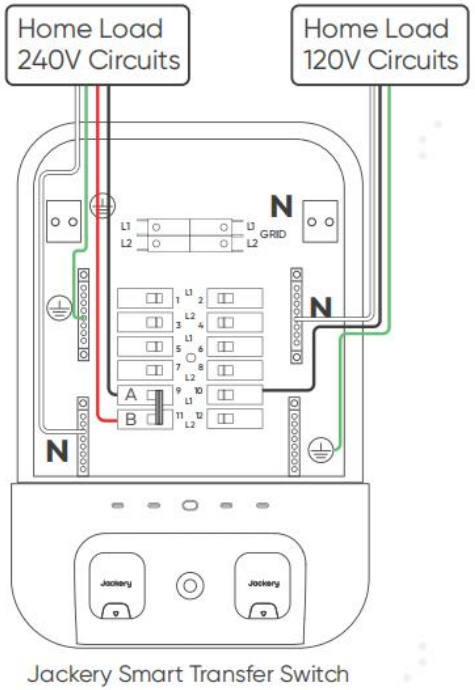

Jackery Smart Transfer Switch

- The load circuit's Neutral wire, Hot wire, and Ground wires disconnect to the STS.

3 Remove brackers

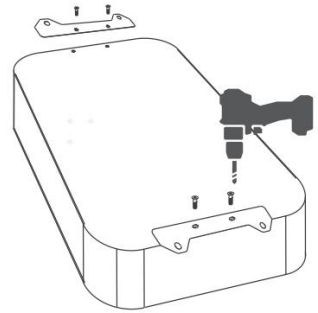

- Remove the upper and lower wall brackets on the back of the Smart Transfer Switch