


# Installation Guide

## Outdoor Windguard



WGO270  
WGO300  
WGO360  
WGO420  
WGO540

**NOTE:** Side shelves will no longer be able to fold down when installed on freestanding models.

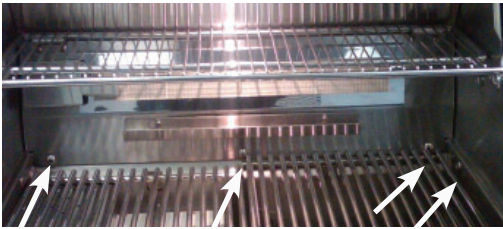

Remove the cooking grates and spit rod. LOOSEN but DO NOT REMOVE the large Philips-head screws on the inside rear and side of the firebox. These are located near the top edge of the firebox at the cooking grate level. There may be 5 to 7 each depending on your model.

After inserting the windguard, take care to center the windguard left to right and leave enough space in the rear for the heated hood to open without interference with the windguard. Once positioned, tighten the Philips head screws to secure the windguard in place.

For built-in model a clearance of 6" is needed to the rear of the enclosure.

Please contact Lynx Customer Care at 888-289-5969 or Viking Range, LLC at 888-845-4641 if you have any questions.



With the screws loose, lift the rear hood off the fire-box just high enough to insert the windguard. Slide the windguard between the rear hood and the firebox. You may need to use a flathead screwdriver to lift the rear hood. Be careful not to scratch the stainless steel. We recommend 2 or 3 people to install the windguard.

